


SAND CUM HIGHWAY

LIGHT TRUCK TYRE

Offers good Mileage and high Durability with excellent control in both high ways and sandy terrain

SALIENT FEATURES	RESULTS & BENEFITS
Double chevron pattern	All terrain performance
Deep groove with wide openings on shoulder	Excellent traction in sands with self cleaning system
Wide flat tread	Improved load distribution and wear characteristics

Recommended fitment

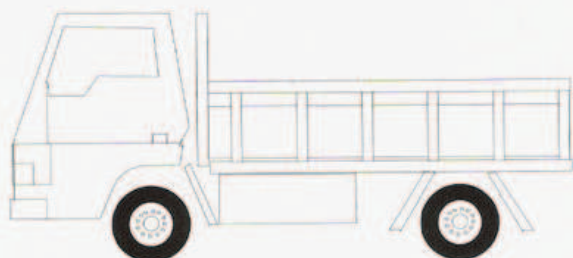

Specifications

Size	LR/PR	Max Speed KM/PH*	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
											Load		Pressure*		Load		Pressure*	
				mm	In	mm	In	mm	32nds		Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
7.50-16	D/8	100	6.0	815	32.1	219	8.6	11	23.9	16N	1120	2470	415	60	975	2150	415	60

