

GURKHA 4X4

Black Beauty



FORCE
12 
FREE SERVICES
3 LACS / 3 YEARS
UNMATCHED WARRANTY


BS III
compliant

Black Beauty



Salient Features



Stainless Steel Air Intake Snorkel



Silver Grey Powder Coated Bumpers & Cow Guard

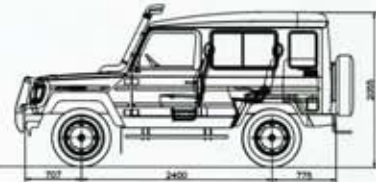

- ▶▶ Four Wheel Drive for All Terrain Application
- ▶▶ Differential Lock for stuck free drive (muddy areas)
- ▶▶ Powerful and Fuel Efficient BS-III Diesel Engine
- ▶▶ Stainless Steel Snorkel and Silver Grey Powder Coated Bumpers, Cow Guard and Spare Wheel Carrier.
- ▶▶ Fog Lamps for extremely demanding poor weather driving
- ▶▶ High Performance Gear Box - Smooth and Silent Operation
- ▶▶ Power Steering for easy maneuverability
- ▶▶ Low N-V-H (Noise - Vibration - Harshness)
- ▶▶ Independent Front Suspension - Excellent Riding Comfort, Superb Handling and Safe Driving.
- ▶▶ Upgraded, Spacious and Comfortable Beige Interiors
- ▶▶ Radial Tyres & Disc Brakes - Firm Road Grip and Safe Driving
- ▶▶ Additional Indicator Lamps on Bonnet Top LH/RH
- ▶▶ Available in Black Colour (Denoting Strength and Authority)

Authorised Dealer :

Technical Specifications

Engine	: TD 2650 FTI BS-III Turbo Charged Intercooled EGR & Oxycat	Brakes	:
Type	: Direct Injection	Service Brakes	: Dual Circuit Hydraulic Vacuum Assisted
Displacement	: 2596 cc	Front	: Disc
Compression Ratio	: 18:1	Rear	: Drum - Duo Servo with LSV
Max Output	: 75Hp @ 3200 rpm	Wheel & Tyres	: 7.50 R16 Tyre with 5.5 F x 16 Rim
Max Torque	: 195 Nm @ 1800-2000 rpm	Fuel Tank Capacity	: 63 Ltr
Clutch	:	Dimensions (mm)	: Metal Top Soft Top
Type	: Single Plate, Dry Friction, Hydraulically Actuated	Wheel Base	: 2400 2400
Transmission	: G1 18/5B - Overdrive	Overall Width	: 1660 1660
No. of Gears	: 5 Forward, 1 Reverse	Overall Length	: 4132 4132
Transfer Case	: Single Lever Selective 4X4 with ratio 2.4:1 with PTO	Overall Height	: 2055 1985
Front Axle	: Axle Ratio 4.9 with Diff lock (Live Rigid)	Overhang Front	: 707 707
Rear Axle	: Axle Ratio 4.9 with Diff lock (live Rigid)	Overhang Rear	: 775 775
Steering	:	Track Front	: 1430 1430
Type	: Power Steering	Track Rear	: 1440 1440
Turning Radius	: 5.8 mtrs.	Weight	:
Chassis Frame	: Tubular Ladder Type	FAW	: 1050 1050
Suspension	:	RAW	: 1460 1460
Front	: Independent with Solid Torsion Bar & Hydraulic Telescopic Shock Absorber & Antirollbar	GVW	: 2510 2510
Rear	: Semi Elliptical Leaf Spring with Hydraulic Telescopic Shock Absorber	Ground Clearance	: 235 235
		Seating Capacity	: 6+D

NOTE : Contents not binding. All specifications are subject to change without notice & without liability. The data included herein is to be regarded as approximate. Accessories shown are not part of standard equipment. * Subject to availability, Colours shown may vary from actual body colours due to printing on paper.

