



**MBOMBE 4**






# MBOMBE 4


MULTI-ROLE, HIGHLY DYNAMIC MINE-PROTECTED  
ARMOURED VEHICLE

- Multi-role platform
- Innovative flat floor design
- Paramount design- Independant suspension
- Proven reliable drivelines in-service
- Continuous operation from - 20° to + 50° Celcius

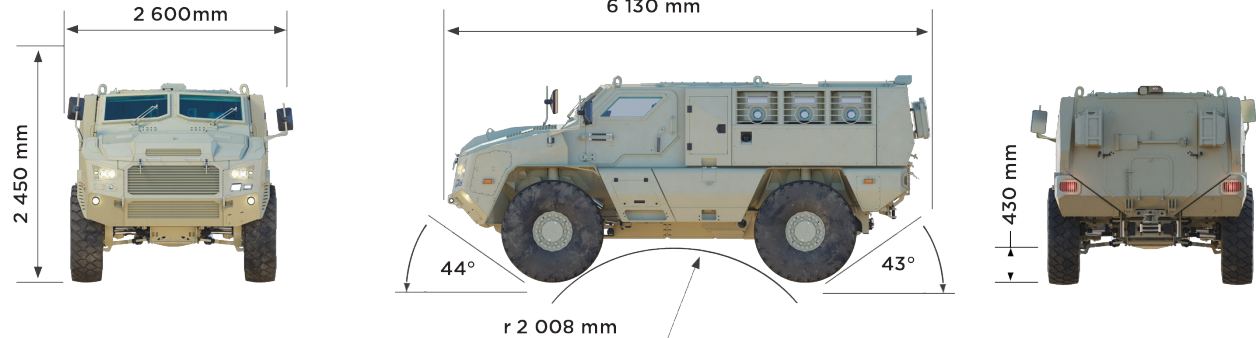

GENERAL SPECIFICATIONS	
Crew	2+1+4
Kerb Weight	13 300 kg
Payload	2700kg
Wheelbase	3300mm
Combat Weight-GVM	16 000kg
Construction	Monocoque Hull (Not Chassis based)
PERFORMANCE	
Max Speed-Road	140km/h (Burst speed)
Turning Circle	18 m kerb to kerb
Road Range	8 00 km
Engine	Turbo Diesel 6 Cylinder, Intercooled, 336kW, 1627Nm
Power to Weight Ratio (kW/ton)	24kW/T @ 13 900kg
Transmission	Automatic 6 speed
Diff Locks	Air Operated Front, Centre and Rear
Brakes	Pneumatic, disc, ABS standard
Tyres	16.00 R20
Air conditioner	16kW
Electrical System	24V
Ballistic Protection Crew Compartment	STANAG 4569-Level 3
Ballistic Protection Engine Compartment	STANAG 4569-Level 3 (Grille only at 0°)
Blast Protection	STANAG 4569-Level 4a & 4b 50kg TNT - side blast

OPTIONS
Run Flat Inserts (RFI)
Central Tyre Inflation System (CTIS)
Radios, Intercom Systems
Battlefield Management Systems
Winch
NATO Standard Tow Hitch
Public Address System
Fire Suppression Systems
Roof Hatch and Various Turret Systems
CBRN protection kit
Vehicle Location and Tracking System
Add-on Protection Kit (Side Mirrors, Door Hinges, Windows)
Driver Assist Camera System
Add-on armour kits
Winterisation Kit

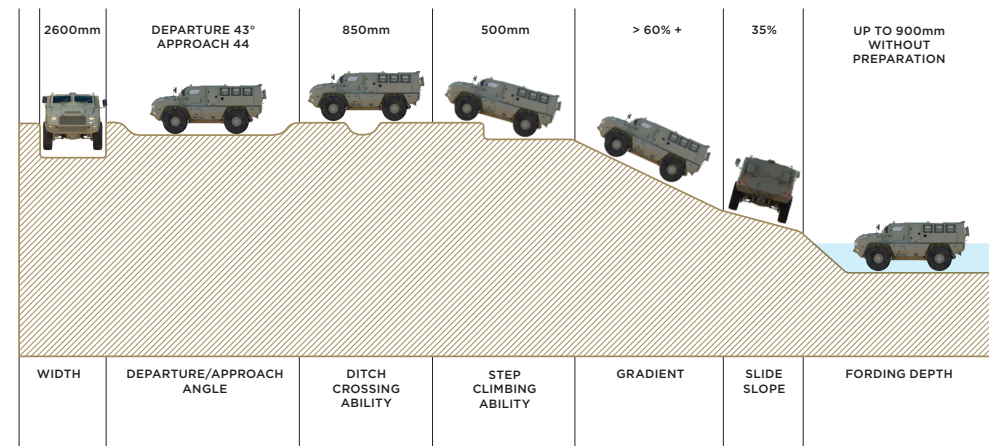

998 16th Road, Halfway House, 1685 South Africa [www.paramountgroup.com](http://www.paramountgroup.com)

t +27 11 086 6800 f +27 11 086 6801 e [info@paramountgroup.com](mailto:info@paramountgroup.com)

Specifications subject to change without prior notice. Possession of this printed material does not constitute an offer and/or valid legal contract of any type between Paramount Group and the recipient.