

Two Post Lift | Four Post Lift | Puzzle Parking | Smart Parking

ParkBy FOUR-POST LIFT




Technical Data		
MODEL	HDL-2115	HDL-1815
Max. Lifting Load	4000 Kg. 2000 Kg.	
Total Length	5300 mm 4500 mm	
Total Width	2970 mm	2970 mm
Drive through Width	2200 mm	2200 mm
Total Height	2715 mm	2415 mm
Max. Lifting Height	2100 mm	1800 mm
Lifting/Lowering Time	60/40 Sec.	50/35 Sec.
Electrical Required	230- 415V, 1/ 3 Ph, 50 Hz	230- 415V, 1/ 3 Ph, 50 Hz
Working By	Hydraulically Hydraulically	
Lock Release	Electric Auto Release Electric Auto Release	

Compatible Car Segments

MODEL	UPPER LEVEL	LOWER LEVEL
HDL-2115	SUV/Sedan/ Hatchback	SUV/Sedan/ Hatchback
HDL-1815	Sedan/ Hatchback	Sedan/ Hatchback



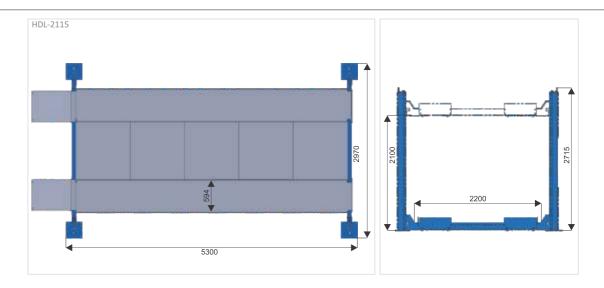

Features



Hydraulic System:

This Lift equipped with Special designed Power Pack and a Single Hydraulic Cylinder for minimum exposure and maximum reliable performance.



This Key switch for Up/Down Operation to Protect against Misuse.



Spring-loaded safety locks automatically engage continuously as lift is raised. Secondary lock system acts as a slack cable device to engage in the unlikely event of cable failure.



This sensor makes sure that car parked at Upper level does not move downwards when there is car parked at lower level, even if it is signaled by anyone to come in sensing area.



Emergency Stop:

"EMERGENCY –STOP" button helps to be ended operation quickly in order to prevent injury or damage.



Anti-slip Platform:

The platform is special designed to be very Safe parking and will also avoid any human slippage.

Α	1.			
Ap	กแ	CJ.	tin	n
$\neg \nu$	ИII	uа	uu	

Residential	Personal Bungalow, Duplex Bungalow, Apartments
Commercial/Corporate House	Valet or Single Occupancy Parking



Patson HydroTech

- B-182, GIDC Estate, Sector-25, Gandhinagar, Gujarat
- 079-23287207
- +91 99139 60362
- info@patsonhydrotech.com
- www.patsonhydrotech.com





