
| SUZUKI JIMNY SPECIFICATIONS | | | | | | |
|-----------------------------|---------|-----------------|----------------------|-------|--|--|
| Engine | | | 1.3L VVT | | | |
| Transmission | | 5MT | 4AT | | | |
| ENGINE | | | | | | |
| Туре | | | M13A | | | |
| Number of cylinders | | | 4 | | | |
| Number of valves | | | 16 | | | |
| Piston displacement | | cm ³ | 1 328 | | | |
| Bore x stroke | | mm | 78.0 x 69.5 | | | |
| Compression ratio | | | 9,5 | | | |
| Maximum output | | kW @ r/min | 63/6,000 | | | |
| Maximum torque | | Nm @ r/min | 110/4,100 | | | |
| Fuel distribution | | | Multipoint injection | | | |
| TRANSMISSION | | | | | | |
| Туре | | | 5MT | 4AT | | |
| Gear Ratio | 1st | | 4,425 | 2,875 | | |
| | 2nd | | 2,304 | 1,568 | | |
| | 3rd | | 1,674 | 1,000 | | |
| | 4th | | 1,190 | 0,696 | | |
| | 5th | | 1,000 | - | | |
| | Reverse | | 5,151 | 2,300 | | |
| Final gear ratio | | | 4,300 | 4,090 | | |
| Transfer gear ratio | High | | 1,000 | 1,320 | | |
| | Low | | 2,002 | 2,643 | | |
| DIMENSIONS | | | | | | |
| Overall length | | mm | 3 545 | | | |
| Overall width | | mm | 1 600 | | | |
| Overall height | | mm | 1 670 | | | |
| Wheelbase | | mm | 2 250 | | | |
| Tread | Front | mm | 1 355 | | | |
| | Rear | mm | 1 365 | | | |
| Minimum turning radius | | m | 4,9 | | | |
| Ground clearance | | mm | 190 | | | |
| Approach angle | | degrees | 34 | | | |
| Ramp breakover angle | | degrees | 31 | | | |
| Departure angle | | degrees | 46 | | | |

| SUZUKI JIMNY SPECIFICATIONS | | | | | | | |
|-----------------------------|--|---------|------------------------------------|-------|--|--|--|
| CAPACITIES | | | | | | | |
| Seating capacity | | persons | 4 | | | | |
| Luggage capacity | Max. Volume (Manufacturer data) | litres | 816 | | | | |
| | Rear seatback tumble-folded (VDA method) | litres | 324 | | | | |
| | Rear seatback raised (VDA method) | litres | 113 | | | | |
| Towing capacity | Braked trailer | kg | 1 300 | 1 300 | | | |
| CHASSIS | | | | | | | |
| Steering | | | Recurculating ball | | | | |
| Brakes | Front | | Solid disk | | | | |
| | Rear | | Drum, leading and trailing | | | | |
| Suspension | Front | | 3-link rigid axle with coil spring | | | | |
| | Rear | | 3-link rigid axle with coil spring | | | | |
| Tyres | | | 205/70R15 | | | | |
| WEIGHTS | | | | | | | |
| Kerb weight | | kg | 1 090 | 1 105 | | | |
| Gross vehicle weight | | kg | 1420 | | | | |
| PERFORMANCE | | | | | | | |
| Maximum speed | | km/h | 140 | 135 | | | |
| 0-100 km/h | | sec | 14,1 | 17,2 | | | |
| FUEL CONSUMPTION | | | | | | | |
| Fuel tank capacity | | litres | 40 | | | | |

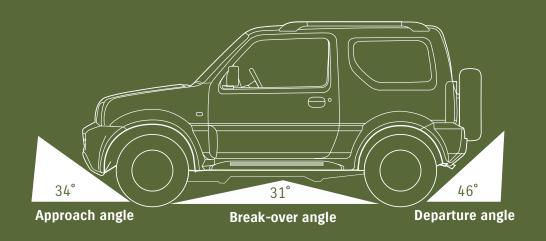

| SUZUKI JIMNY EQUIPMENT | | | | |
|-----------------------------------|--|----|--|--|
| Steering | RHD | | | |
| Engine | Petrol | | | |
| | M13 VVT | | | |
| Drive System | Part-time 4WD | | | |
| Transmission | 5MT/4AT | | | |
| CHASSIS | | | | |
| | 205/70R15 + alloy wheels | * | | |
| | 205/70R15 + alloy wheel | * | | |
| EXTERIOR | | | | |
| | Vertical design + Body Coloured | * | | |
| Wheel arch extensions | Coloured | * | | |
| Side splash panels | Coloured | * | | |
| Roof rails | | * | | |
| Outside door handles | Black | * | | |
| Coloured bumpers | Front and rear | * | | |
| VISIBILTY | | | | |
| Headlamps | Halogen multireflector | * | | |
| Fog lamps | Front | * | | |
| Green-tinted windows | | * | | |
| UV-cut glass | Windscreen | * | | |
| Wipers | Front: 2-speed (low, high) + intermittent + washer | * | | |
| | Rear: 1-speed + washer | * | | |
| Rear window demister | | * | | |
| Outside door mirrors | Coloured | * | | |
| | Electrically adjustable | * | | |
| Day / night rearview mirror | | * | | |
| STEERING AND INSTRUMENT PANEL | | | | |
| 3-spoke steering wheel | Urethane | \$ | | |
| Power steering | | * | | |
| Tachometer | * | | | |
| Light-off and key reminder | Alarm | * | | |
| Driver's seatbelt reminder | Lamp | * | | |
| Door ajar reminder | Alarm | * | | |
| Low fuel warning | Lamp | * | | |
| Average fuel consumption | * | | | |
| Gear position indicator (AT Only) | * | | | |
| Instrument panel centre garnishes | Silver coloured | * | | |

| SUZUKI JIMNY EQUIPMENT | | | | | |
|--|--|----|--|--|--|
| DRIVING AMENITIES | | | | | |
| Digital clock | \$ | | | | |
| Electric windows | Front | * | | | |
| Central door locking (including tailgate) | | * | | | |
| Remote control door locks With hazard lamp answerback function | | \$ | | | |
| Air conditioner | Manual | \$ | | | |
| Heater | | | | | |
| Audio | Antenna (mounted at front of roof) | \$ | | | |
| | Speaker x2 | \$ | | | |
| | CD tuner | \$ | | | |
| INTERIOR | | | | | |
| Cabin lights | Front cabin light (3-position) | \$ | | | |
| Driver's sun visor | | \$ | | | |
| | With ticket holder | \$ | | | |
| | With vanity mirror | \$ | | | |
| Passenger's sun visor | | \$ | | | |
| Assist grips | Passenger's side | \$ | | | |
| | Rear x2 | \$ | | | |
| Cup holders | Front x2 | \$ | | | |
| | Rear x2 | \$ | | | |
| Storage pockets | Front doors | \$ | | | |
| | Rear quarter trim | \$ | | | |
| 12V interior accessory socket | Instrument panel x1 | \$ | | | |
| Ashtray | | \$ | | | |
| Remote fuel lid opener | | \$ | | | |
| Cloth-accented door trim | | \$ | | | |
| SEATS | | | | | |
| Front seats | Walk-in mechanism (passenger's side) | \$ | | | |
| Rear seat | 50:50-split single-folding | \$ | | | |
| | Head rests | \$ | | | |
| Seat upholstery material | Fabric | \$ | | | |
| LUGGAGE AREA | | | | | |
| Luggage area underfloor compartment | | * | | | |
| SAFETY AND SECURITY | | | | | |
| SRS front dual airbags | | | | | |
| Seatbelts | Front: 3-point ELR seatbelts with height adjusters | * | | | |
| | with pretensioners and force limiters | \$ | | | |
| | Rear: 3-point ELR seatbelts x2 | \$ | | | |
| ISOFIX child seat anchorages | Rear x2 | * | | | |
| Side impact door beams | * | | | | |
| ABS | * | | | | |
| High-mount stop lamp | * | | | | |
| Immobiliser | * | | | | |
| Visible VIN | | * | | | |